

T H E R M O M E T R I C S
A C O M M I T M E N T T O E X C E L L E N C E

GE-1571



Fast Response Cylinder Head Temperature Sensor (CHT)

This temperature sensor monitors the temperature of an engine cylinder head or engine block. This sensor's purpose is to provide a signal output that is proportional to engine temperature. This signal can be used as an input to a temperature gauge, provide input to an ECU (Engine Control Unit) or control a cooling fan circuit.

Applications

- Engine block temperature
- Engine cylinder head temperature

Features


- High accuracy and long term stability
- Fast response time
- Pigtail connector
- Existing field proven design
- Alternate RvT curves available
- Different geometries/connection systems to meet package requirements
- 200°C Max operating temperature
- Hardened SS body
- Other resistance and beta values available

Amphenol
Advanced Sensors

GE-1571 Specifications

- **Operating Temperature Range**
-40°C to 200°C
- **Storage Temperature Range:**
-40 to 150 °C
- **R @ 25°C :**
2820 Ohms
- **Response time:**
<15 seconds
- **Housing Material**
416 Stainless Steel
- **Weight:**
~27 grams
- **Beta 25/85**
4073
- **Connector**
Delphi Metri-pack 150
- **Mating Connector**
P/N 12052641

R vs. T			
Temp. (°C)	Resistance (Ω)	Resistance Tolerance (±%)	Temp. Tolerance (±°C)
-40	101767	9.59	1.42
-25	38928	8.28	1.36
0	9483	6.27	1.20
25	2820	4.86	1.08
85	286	7.74	2.40
100	179.6	8.34	2.79
180	24.80	9.88	4.80
200	16.73	9.90	5.24

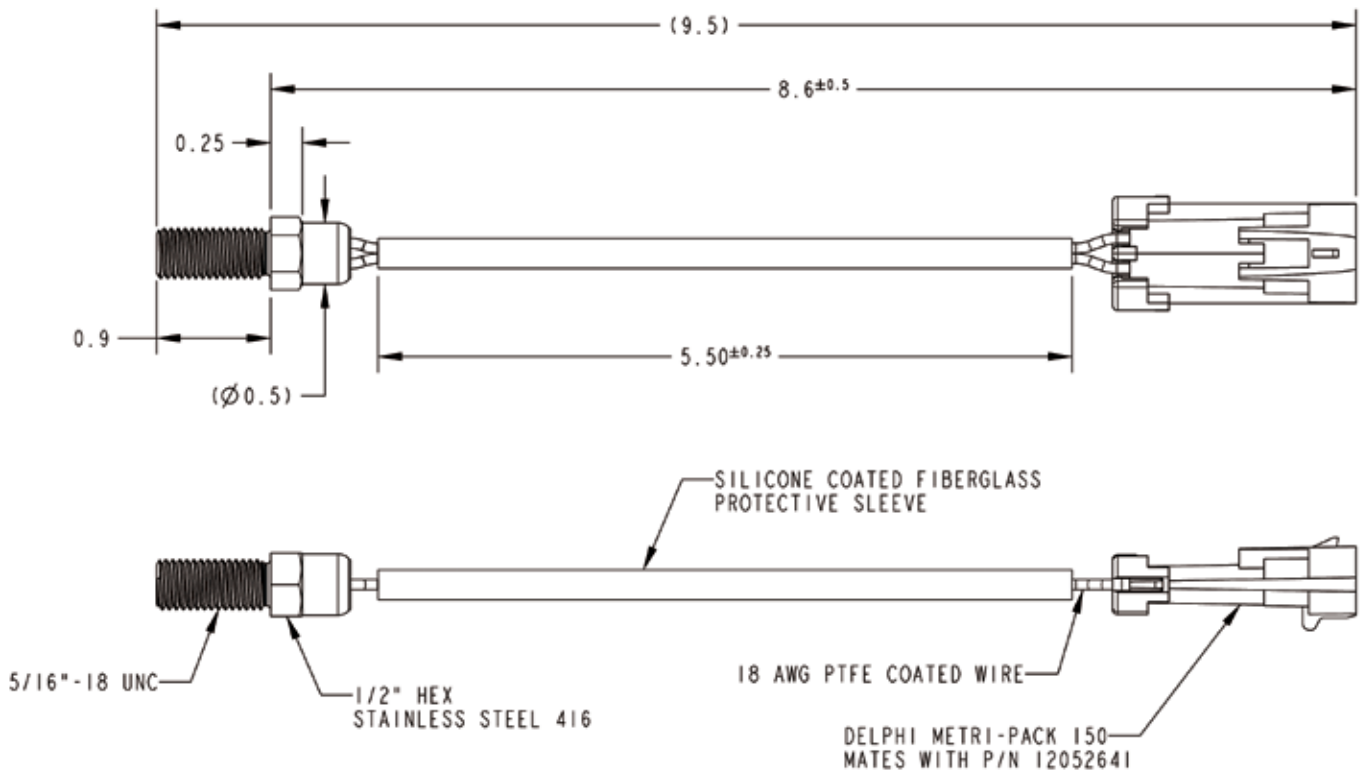

Amphenol
Advanced Sensors

www.amphenol-sensors.com

© 2016 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

AAS-920-674A - 03/2016